
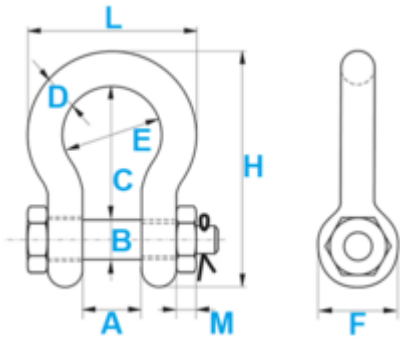


Exoset Bow Shackle with Screw Collar Pin

Curved Exoset Shackle

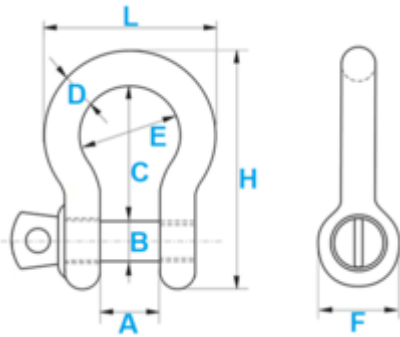

Label	Dimension A [mm]	Dimension B [mm]	Dimension C [mm]	Dimension D [mm]	Dimension E [mm]	Dimension F [mm]	Dimension H [mm]	Dimension M [mm]	WLL [kg]
BluePin B SCP 1t	16.8	11	35.7	9.7	26.2	23.1	62.2	11	100
BluePin B SCP 1.5t	19	13	42.2	11.2	29.5	26.9	73.9	13	150
BluePin B SCP 2t	20.6	16	47.2	12.7	33.1	30.2	83.5	16	200
BluePin B SCP 3.25t	27	20	60	16	42	39	106	20	325
BluePin B SCP 4.75t	31.8	22	71	19	51	47	125	22	475
BluePin B SCP 6.5t	36.6	27	84	22	58	54	147	27	650
BluePin B SCP 8.5t	43	28.5	95	25	68	60	166	30	850
BluePin B SCP 9.5t	46	33	108	28	74	66	185	33	950
BluePin B SCP 12t	51.5	36	119	32	82	76	208	36	1200
BluePin B SCP 13.5t	57	38	131	35	89	84	228	-	1350
BluePin B SCP 17t	60.5	42	148	38	98	92	254	42	1700
BluePin B SCP 25t	73	51	177	45	127	109	303	51	2500
BluePin B SCP 35t	82.5	57	197	51	146	127	-	57	3500

ORDER NUMBERS



Exoset Bow Shackle with Screw Collar Pin

Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

WLL	BluePin B SCP 1.5t	BluePin B SCP 12t	BluePin B SCP 13.5t	BluePin B SCP 17t	BluePin B SCP 1t	BluePin B SCP 25t	BluePin B SCP 2t	BluePin B SCP 3.25t	BluePin B SCP 35t	BluePin B SCP 4.75t	BluePin B SCP 6.5t	BluePin B SCP 8.5t	BluePin B SCP 9.5t
1	-	-	-	-	2000772	-	-	-	-	-	-	-	-
1.5	2000773	-	-	-	-	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	1058249	-	-	-	-	-	-
3.25	-	-	-	-	-	-	-	1058250	-	-	-	-	-
4.75	-	-	-	-	-	-	-	-	-	2000774	-	-	-
6.5	-	-	-	-	-	-	-	-	-	-	1058269	-	-
8.5	-	-	-	-	-	-	-	-	-	-	-	1051713	-
9.5	-	-	-	-	-	-	-	-	-	-	-	-	2000776
12	-	2000777	-	-	-	-	-	-	-	-	-	-	-
13.5	-	-	1058273	-	-	-	-	-	-	-	-	-	-
17	-	-	-	2000779	-	-	-	-	-	-	-	-	-
25	-	-	-	-	-	2000780	-	-	-	-	-	-	-
35	-	-	-	-	-	-	-	-	2000781	-	-	-	-

- Norms EN 13889
- Grade 50
- Main Material Steel
- Temperature Range 0° C to + 200° C
- Shackle Bolt screw collar pin
- Shackle Type bow shackle
- Safety Factor 5:1
- Packaging Unit (PU) Content 1
- Packaging Unit (PU) pcs



Exoset Bow Shackle with Screw Collar Pin

Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom