



Technisches Datenblatt




MaXafe

Schwerlastzurrigurt

SpanSet GmbH & Co. KG
 Jülicher Straße 49-51, 52531 Übach-Palenberg
 Tel +49 (0) 2451 4831-0
 Fax +49 (0) 2451 4831-207
 E-Mail: info@spanset.de, Web: www.spanset.de

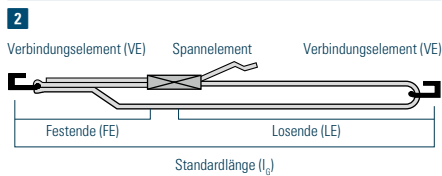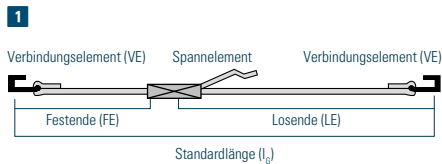Technische Daten



	Zweiteilig mit Spitzhakenkarabiner 1	Zweiteilig mit Triangel / LS Haken 1	Carlash-System mit Triangel/LS Haken 2
Spannelement	50 mm Druck- Ratsche	50 mm Druck- Ratsche	50 mm Druck- Ratsche
Art.-Nr.	D072583	D072583	D072583
Verbindungselement (VE)			
Art.-Nr.	2x Spitzhakenkarabiner D073404	2x Triangel / LS Haken D035876 / D016983	2x Triangel / LS Haken D001085
LC	5000 daN	5000 daN	10000 daN
Bandbreite	55 mm	55 mm	55 mm
Banddicke	ca. 3 mm	ca. 3 mm	ca. 3 mm
Standardlänge (l_g)	3,0 m / 4,0 m	3,0 m / 4,0 m	3,0 m / 4,0 m
Bandlänge	Variabel	Variabel	Variabel
Banddehnung	≤ 2,00 %	≤ 2,00 %	≤ 2,00 %
Systemgewicht für 3,0 m	4,5 kg	6,6 kg	9,7
Systemgewicht für 4,0 m	4,7 kg	6,8 kg	10,0

Einsatztemperatur °C: - 40 bis + 100°C

Bandmaterial: PES / LCP

Bandfarbe: neon-grün

Kennzeichnung: ausreißfestes Qualitätslabel,
Angabe der zulässigen Zugkraft LC in daN

Norm: In Anlehnung an EN 12195-2

Ⓢ Betriebsanleitung und Konformität liegen jedem MaXafe Schwerlastzurrigurt bei.



Technical data sheet

MaXafe

Heavy duty ratchet

SpanSet GmbH & Co. KG
 Jülicher Straße 49-51, 52531 Übach-Palenberg
 Tel +49 (0) 2451 4831-0
 Fax +49 (0) 2451 4831-207
 E-Mail: info@spanset.de, Web: www.spanset.de

Technical data sheet

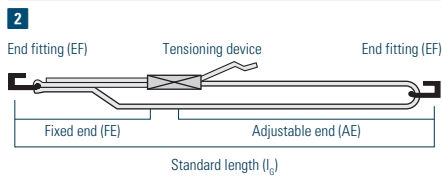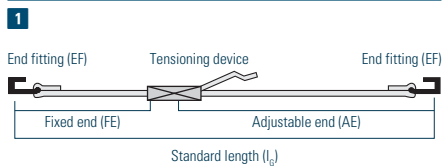

	two-piece with hook and keeper 1	two-piece with delta hook 1	Carlash-System delta hook 2
Tensioning device	50 mm Pull-down ratchet	50 mm Pull-down ratchet	50 mm Pull-down ratchet
Product code	D072583	D072583	D072583
End fitting (VE)	2x hook and keeper D073404	2x delta hook D035876 / D016983	2x delta hook D001085
LC	5000 daN	5000 daN	10000 daN
Strap width	55 mm	55 mm	55 mm
Strap height	ca. 3 mm	ca. 3 mm	ca. 3 mm
Standard length (l_s)	3,0 m / 4,0 m	3,0 m / 4,0 m	3,0 m / 4,0 m
Strap length	Variable	Variable	Variable
Strap strain	≤ 2,00 %	≤ 2,00 %	≤ 2,00 %
Total weight for 3,0 m	4,5 kg	6,6 kg	9,7
Total weight for 4,0 m	4,7 kg	6,8 kg	10,0

Working temperature °C:..... - 40 – + 100°C

Strap material:..... PES / LCP

Strap color:..... neon-green

Identification:..... Label that is resistant to being pulled out,
permissible tensile force LC in daN

Norm:..... referring to EN 12195-2

① Operating manual and conformity are enclosed with each MaXafe product.