




PowerForce

High cut and wear resistance for extreme durability, they handle sharp edges ($\geq 2\text{mm}$) without extra protection, ensuring safety and longevity

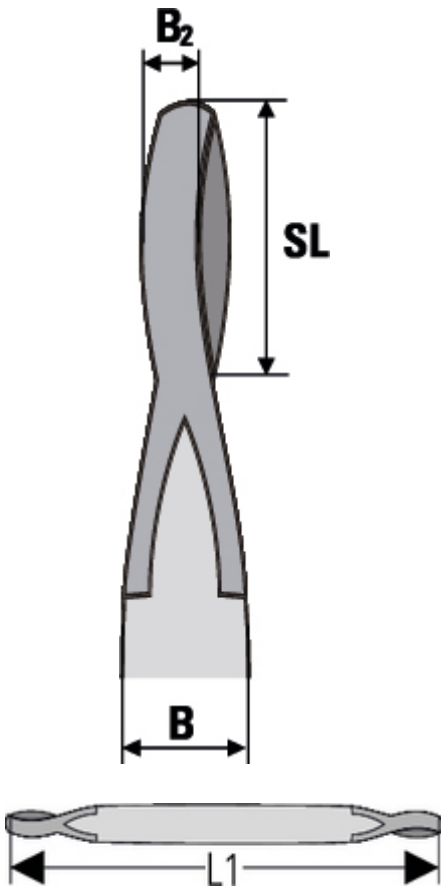

Item Name short	Colour	Dimension L1 min [m]	Dimension L1 [m]	WLL kg [kg]	WLL t [t]	Webbing Width B [mm]	Weight Net [kg]
PowerForce 1ply 1000 2m	Purple	1	2	1000	1	40	0.36
PowerForce 1ply 1000 3m	Purple	1	3	1000	1	40	0.44
PowerForce 1ply 1000 4m	Purple	1	4	1000	1	40	0.52
PowerForce 1ply 1000 5m	Purple	1	5	1000	1	40	0.6
PowerForce 1ply 1000 6m	Purple	1	6	1000	1	40	0.68
PowerForce 1ply 1000 8m	Purple	1	8	1000	1	40	0.84
PowerForce 1ply 2000 2m	Green	1.2	2	2000	2	80	0.72
PowerForce 1ply 2000 3m	Green	1.2	3	2000	2	80	0.88
PowerForce 1ply 2000 4m	Green	1.2	4	2000	2	80	1.04
PowerForce 1ply 2000 5m	Green	1.2	5	2000	2	80	1.2
PowerForce 1ply 2000 6m	Green	1.2	6	2000	2	80	1.36
PowerForce 1ply 2000 8m	Green	1.2	8	2000	2	80	1.68
PowerForce 1ply 3000 2m	Yellow	1.5	2	3000	3	120	1.18
PowerForce 1ply 3000 3m	Yellow	1.5	3	3000	3	120	1.42
PowerForce 1ply 3000 4m	Yellow	1.5	4	3000	3	120	1.66
PowerForce 1ply 3000 5m	Yellow	1.5	5	3000	3	120	1.9
PowerForce 1ply 3000 6m	Yellow	1.5	6	3000	3	120	2.14
PowerForce 1ply 3000 8m	Yellow	1.5	8	3000	3	120	2.62



PowerForce Loop Sling

Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

Item Name short	Weight for 1m [kg]	Weight per Meter [kg/m]
PowerForce 1ply 1000 2m	0.18	0.08
PowerForce 1ply 1000 3m	0.18	0.08
PowerForce 1ply 1000 4m	0.18	0.08
PowerForce 1ply 1000 5m	0.18	0.08
PowerForce 1ply 1000 6m	0.18	0.08
PowerForce 1ply 1000 8m	0.18	0.08
PowerForce 1ply 2000 2m	0.36	0.16
PowerForce 1ply 2000 3m	0.36	0.16
PowerForce 1ply 2000 4m	0.36	0.16
PowerForce 1ply 2000 5m	0.36	0.16
PowerForce 1ply 2000 6m	0.36	0.16
PowerForce 1ply 2000 8m	0.36	0.16
PowerForce 1ply 3000 2m	0.59	0.24
PowerForce 1ply 3000 3m	0.59	0.24
PowerForce 1ply 3000 4m	0.59	0.24
PowerForce 1ply 3000 5m	0.59	0.24
PowerForce 1ply 3000 6m	0.59	0.24
PowerForce 1ply 3000 8m	0.59	0.24

ORDER NUMBERS

Dimension L1	1000 kg	2000 kg	3000 kg
2	2002972	2002973	2002974
3	2003442	2003444	2003446
4	2003443	2003445	2003447
5	2003937	2003940	2003943
6	2003938	2003941	2003944
8	2003939	2003942	2003945

■ Norms	EN 1492-1
■ Belt Layers	1
■ Main Material	High molecular weight polyethylene (HMPE)
■ Webbing Thickness	3 mm
■ Temperature Range	-40°C bis +60°C
■ Safety Factor	7:1
■ Label Protection	Yes
■ Packaging Unit (PU)	pcs
■ Packaging Unit (PU) Content	1

SpanSet (UK) Limited
Telford Way Middlewich
Cheshire CW10 0HX
United Kingdom
Tel.: +44 (0) 1606
737494
info@spanset.co.uk
www.spanset.co.uk



PowerForce Loop Sling

Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

SpanSet
Certified
Safety



PowerForce Loop Sling

Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom